




# DOUBLE EGRESS HOLLOW METAL DOORS AND FRAMES

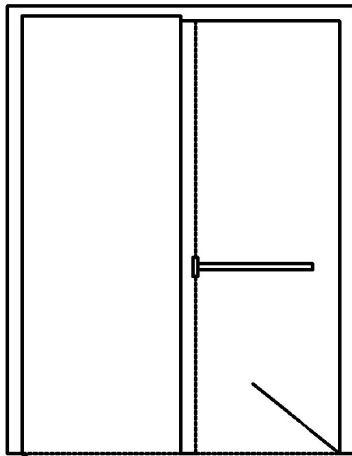


Typical Elevations

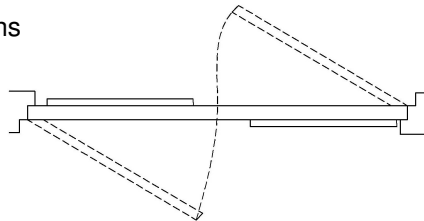


Typical Plan View



Typical Head



Alternate Head



Typical Jamb

## PRODUCT

1-3/4" (44 mm) thick pairs of doors swinging in opposite directions, in ratings up to 3 Hour fire protection.

Double egress assemblies permit traffic flow in both directions through the same opening. Where double egress doors are used for 1-1/2 Hour applications or less, they may be installed without astragals. For 3 Hour rated double egress doors, an over-lapping astragal is required.

## MAXIMUM DOOR OPENING

8'0" x 10'0" (2438 x 3048 mm)

## MAXIMUM LEAF SIZE

4'0" x 10'0" (1219 x 3048 mm)

## HARDWARE

Hinges:

Offset Pivots:

Locks, Latches, Deadbolts: Not Permitted

Fire Exit Hardware:

Overhead Closers:

Floor Closers:

Flush Bolts: Not Permitted

## ANCHORS

Anchors are available for new or existing masonry, poured concrete and wood or steel stud partitions.

## FRAMES

A fire rated frame listed for use with double egress doors is required.

## SPECIFICATIONS

Frames shall be fabricated from hot rolled, cold rolled, galvanized, galvanealed or stainless steel. Refer to "Profiles for Fire Rated Frame Products."



150 Division Drive  
Wilmington, NC 28401  
[www.CustomMetalProductsNC.com](http://www.CustomMetalProductsNC.com)

Revised 041907

Phone: 866-893-3338  
Fax: 866-963-1355  
[Info@CustomMetalProducts.bz](mailto:Info@CustomMetalProducts.bz)